


Bs-Temperature

H=1194A/m

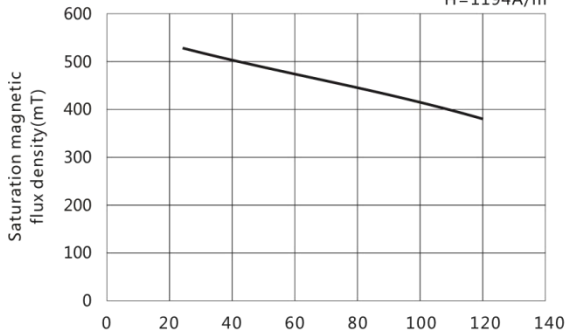

Initial permeability	μ_i	25°C	2500±25%
Saturation magnetic flux density	Bs(mT)	25°C	520
		100°C	410
Remanence	Br(mT)	25°C	210
		100°C	60
Coercivity	Hc(A/m)	25°C	14
		100°C	7
Core loss	Pcv(kW/m³)	25°C	600
		60°C	400
		100°C	250

μ_i (G) > 220

Temperature(°C) --- 250

Curie temperature

ρ (Ω ·m) 4



Electrical resistivity

d(kg/m³) 4.8×10^3

Density

μ_i -Temperature

(mm)

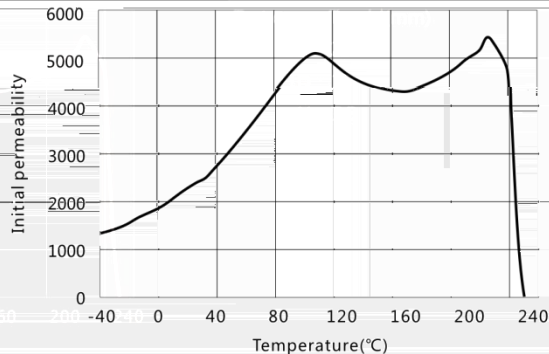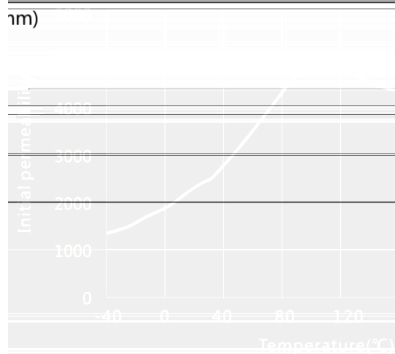


Test core : Toroid(n)

OD : 25

ID : 15

H : 7.5

B-H

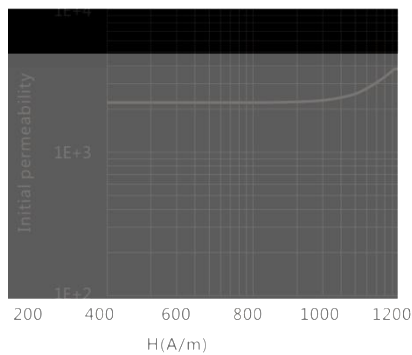

μ_i -Frequency

