



**Bs-Temperature**

H=1194A/m

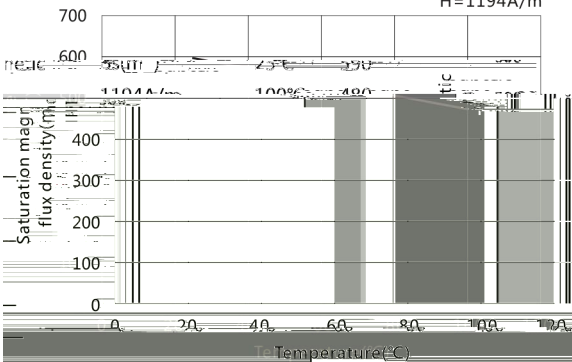

Initial permeability	$\mu_i$	25°C	1600±25%
Remanence	$B_r$ (mT)	25°C	150
		100°C	250
Coercivity	$H_c$ (A/m)	25°C	35
		100°C	30
Core loss	$P_{cv}$ (kW/m <sup>3</sup> )	25°C	280
		25kHz 200mT	100°C
Curie temperature	$T_c$ (°C)		>280
Electrical resistivity	$\rho$ ( $\Omega$ ·m)		5
Density	$d$ (kg/m <sup>3</sup> )		$4.8 \times 10^3$
Test core : Toroid(mm)			

**$\mu_i$ -Temperature**

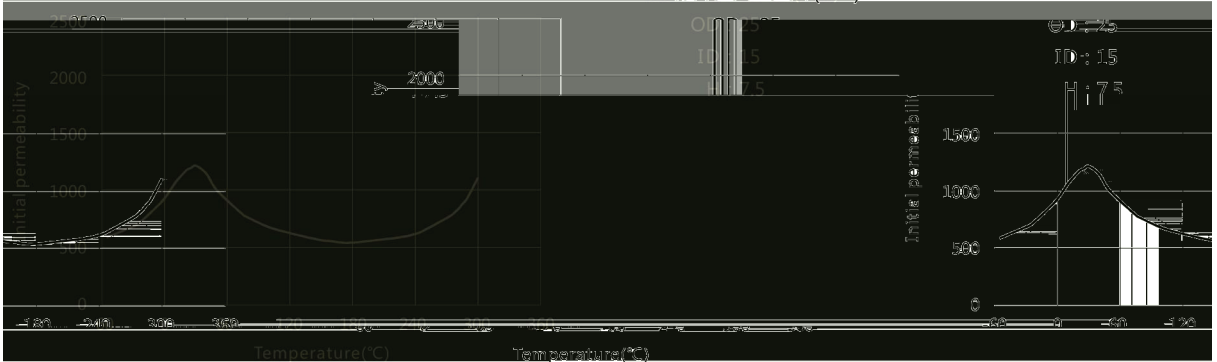

**B-H**

**$\mu_i$ -Frequency**

